



P.O. DRAWER 330 - DUNKIRK, MD 20754 USA TOLL FREE: (800) 368-2573 (USA & CANADA) TEL (301) 855-8300 - FAX (410) 257-7579 WEB SITE: HTTP://WWW.VICTORSTANLEY.COM

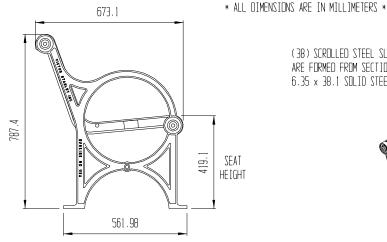

(38) SCROLLED STEEL SLATS -ARE FORMED FROM SECTIONS OF 6.35 x 38.1 SDLID STEEL BARS

CLEARANCE FOR 9.53 ANCHOR BOLTS

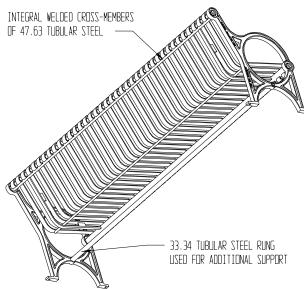

2495.55 2463.8 CENTER-TO-CENTER

CENTER-IN-CENTER DISTANCES ARE APPROXIMATE (VARIATIONS IN CASTINGS ARISE FROM DIFFERENT RATES OF COOLING)

AVAILABLE OPTIONS:

POWDER COATING

10 STANDARD COLORS, CUSTOM COLORS (INCLUDING THE RAL RANGE)

INTERMEDIATE & CENTER ARMRESTS

1.2 METERS, 1.8 METERS, & 2.4 METERS AVAILABLE WITH OPTIONAL ARMRESTS

LENGTHS

STANDARD 1.2 METERS

STANDARD 1.8 METERS

STANDARD 2.4 METERS LENGTH SHOWN

NOTES:

- 1. DUCTILE IRON CASTINGS COME WITH A TEN YEAR WARRANTY AGAINST BREAKAGE
- 2. DRAWING NOT TO SCALE, DO NOT SCALE DRAWINGS.
- 3. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PREHEATED AND CDATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. CDATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH COAT AVERAGES 8-10 MILS (200-250 MICRONS).
- 4. IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL BENCH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
- 5. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
- 6. FOR HIGH SALT ABUSIVE CLIMATES, HOT DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
- 7. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
- 8. THIS PRODUCT IS SHIPPED FULLY ASSEMBLED.



CITY SITES SERIES STANDARD BENCH WITH DUCTILE IRON END FRAMES

SHOWN: STANDARD 2.4-METERS LENGTH

COPYRIGHT 2004 VICTOR STANLEY, INC. ALL RIGHTS RESERVED