


P.O. DRAWER 330 - DUNKIRK, MD 20754 USA TOLL FREE: (800) 368-2573 (USA & CANADA) TEL (301) 855-8300 - FAX (410) 257-7579 WEB SITE: HTTP://WWW.VICTORSTANLEY.CDM



## NULLE :

- 1. DRAWING NOT TO SCALE. DO NOT SCALE DRAWINGS.
- 2. ALL FABRICATED METAL COMPONENTS ARE STEEL SHOTBLASTED, ETCHED, PHOSPHATIZED, PREHEATED, AND ELECTROSTATICALLY POWDER-COATED WITH T.G.I.C. POLYESTER POWDER COATINGS. PRODUCTS ARE FULLY CLEANED AND PRETREATED, PREHEATED AND COATED WHILE HOT TO FILL CREVICES AND BUILD COATING FILM. COATED PARTS ARE THEN FULLY CURED TO COATING MANUFACTURER'S SPECIFICATIONS. THE THICKNESS OF THE RESULTING FINISH COAT AVERAGES 8-10 MILS (200-250 MICRONS).
- 3. IT IS NOT RECOMMENDED TO LOCATE ANCHOR BOLTS UNTIL BENCH IS IN PLACE. THIS VICTOR STANLEY, INC. PRODUCT MUST BE PERMANENTLY AFFIXED TO THE GROUND. CONSULT YOUR LOCAL CODES FOR REGULATIONS.
- 4. ANCHOR BOLTS NOT PROVIDED BY VICTOR STANLEY, INC.
- 5. FOR HIGH SALT ABUSIVE CLIMATES, HOT DIP GALVANIZING BEFORE POWDER COATING IS AVAILABLE. SEE WRITTEN SPECIFICATIONS FOR DETAILS.
- 6. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE. CONTACT MANUFACTURER FOR DETAILS.
- 7. THIS PRODUCT IS SHIPPED PARTIALLY UNASSEMBLED.

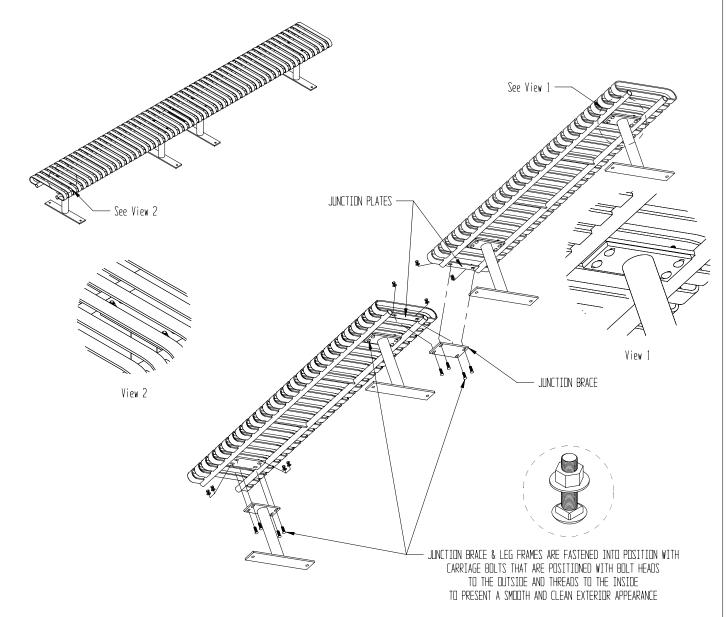

STANDARD ALL STEEL BACKLESS BENCH SHOWN: STANDARD HARDWARE WITH EXPLODED ASSEMBLY STANDARD SURFACE MOUNT OPTIONAL JUNCTION PLATES AND JUNCTION BRACE

COPYRIGHT 2006 VICTOR STANLEY, INC. ALL RIGHTS RESERVED